


SNR S5110 series

L2+ Managed Ethernet switches

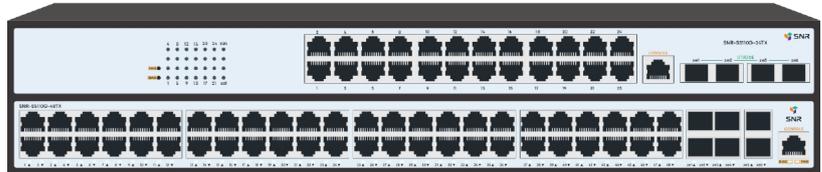

The SNR S5110 series switches are the most affordable solution in their class with 10G SFP+ Uplink ports.

The port capacity and functionality of the series provides the ability to build a gigabit access level in corporate networks and in the networks of telecom operators.

Main features:

- 1/10G SFP+ Uplink ports (with support for 100Mbit/s on all models, and 2.5Gbit/s for SNR-S5110G-24TX(-POE))
- Wide range of security features
- Non-blocking switching matrix
- Simple configuration via SNR CLI
- Built-in surge protection on all copper ports
- Static routing

Switch models

| Models | 10/100/1000Base-T | Combo ports 10/100/1000Base-T 100/1000Base-X SFP | 100/1000Base-X SFP | 1/10G SFP+ |
|-----------------------|-------------------|---|--------------------|------------|
| SNR-S5110G-24TX(-POE) | 24 | - | - | 4 |
| SNR-S5110G-48TX(-POE) | 48 | - | - | 6 |

High performance

The S5110 series switches are built with modern chipsets and have a non-blocking switching matrix that allows all switch ports to operate simultaneously at full speed. It also guarantees high performance and minimal network latency.

| Model | Switching Capacity | Forwarding Rate | MAC |
|-----------------------|--------------------|-----------------|-----|
| SNR-S5110G-24TX(-POE) | 128 Gbps | 95,2 Mpps | 16K |
| SNR-S5110X-48TX(-POE) | 216 Gbps | 160,7 Mpps | 32K |

Resilience

For organizing resilient networks, support for standard protocols STP/RSTP/MSTP.

Link aggregation functionality using LACP or static aggregation allows combining up to 8 ports into one logical interface, increasing the bandwidth ability and resilience at the data link level.

Due to equipping each RJ-45 port with surge protection, the switch components are protected from damage when high voltage applied to the port.

PoE+ support

The S5110 series SNR switches support PoE 802.3af и PoE+ 802.3at standards with a smart capacity management. The PoE technology reduces cost of ownership and makes network maintenance easier. It allows to supply with power directly from switch different types of equipment such as WiFi hotspots, IP/Video phones, thin clients and others.

| Model | Number of PoE ports | Total PoE capacity |
|---------------------|---------------------|--------------------|
| SNR-S5110G-24TX-POE | 24 | 250 Watt |
| SNR-S5110G-48TX-POE | 48 | 370 Watt |

Quality of Service (QoS)

Support for 8 hardware queues per port allows creating flexible service policies for different types of traffic, thus ensuring high quality of sensitive services under high load conditions. Traffic can be classified by field values in L2-L4 headers, including CoS, DSCP, VLAN ID, IP/MAC addresses, and TCP/UDP ports.

| Model | Multicast group | Queues per Port | ACL |
|-----------------------|-----------------|-----------------|------|
| SNR-S5110G-24TX(-POE) | 1024 | 8 | 1792 |
| SNR-S5110G-48TX(-POE) | 4096 | 8 | 3840 |

Security

The S5110 series switches provide a wide range of security features for both service providers and enterprise networks. Hardware Access Control Lists (ACLs) can filter traffic by L2-L4 header fields without performance brake.

Operational convenience

The S5110 series SNR switches have a convenient and intuitive CLI. The system supports all the necessary functionality of the Enterprise/ISP level for building modern data networks and has extensive management and monitoring capabilities via CLI and SNMP.

Dimensions and power supply

The switches are powered by a built-in AC power supply. current 90-264V AC

| Model | Dimension | Weight (Brutto) | Power Consumption | Cooling | Power Supply |
|---------------------|-------------------|-----------------|-------------------|---------|--------------|
| SNR-S5110G-24TX | 440 x 44 x 207 mm | 3,76 kg | 24 Watt | Passive | 90-264V AC |
| SNR-S5110G-24TX-POE | 440 x 44 x 207 mm | 4,4 kg | 300 Watt | Active | 90-264V AC |
| SNR-S5110G-48TX | 440 x 44 x 280 mm | 4,6 kg | 60 Watt | Active | 90-264V AC |
| SNR-S5110G-48TX-POE | 440 x 44 x 320 mm | 6,53 kg | 438 Watt | Active | 90-264V AC |

Technical Brief:

Switching type

- Store-and-Forward

MAC address table

- 16K entries

MAC address table features

- Limiting max number MAC addresses on a port, switch
- Static MAC addresses
- MAC-notification

Flow Control

- 802.3x Flow Control

Jumbo frame

- 12 Kbytes

Flash memory size

- 64 Mbytes

RAM size

- 512 Mbytes

Ring Protection

- ERPS ITU-T G.8032*

Loopback Detection

- Per-port

VLAN

- 4094 VLAN
- Protocol VLAN
- Voice/MAC VLAN
- VLAN Translation
- Private VLAN

L3 functions

- Static routing
- 32 IP interfaces

SNR-S5110G-24TX(-POE)

- 512 IPv4 routes
- 2K IPv4 ARP

SNR-S5110G-48TX(-POE)

- 12K IPv4 маршрутов
- 8K IPv4 ARP

Spanning Tree

- 802.1D STP
- 802.1W RSTP
- 802.1S MSTP
- Root/BPDU Guard
- BPDU Forwarding

Port Aggregation

- LACP 802.3ad / 802.1ax
- Up to 28 groups per switch / up to 8 ports in group
- Load balance src/dst MAC, src/dst IP

Multicast

- 1024 IGMP groups (SNR-S5110G-24TX(-POE))
- 4096 IGMP groups (SNR-S5110G-48TX(-POE))
- IGMP v1/v2/v3 snooping
- IGMP Fast leave
- IGMP Snooping Querier
- Multicast VLAN Registration
- IGMP Filter
- IGMP limit

QoS

- 8 queues per port
- Bandwidth Control
- Traffic classification per port, ACL, VLAN ID, CoS, ToS, DSCP, IPv6 Flow Label, TCP/UDP ports, protocol type, traffic class IPv6, IPv4
- Remarking DSCP, CoS/802.1p, Precedence, ToS
- SP, WFQ

ACL

SNR-S5110G-24TX(-POE)

- 1792 ACL

SNR-S5110G-48TX(-POE)

- 3840 ACL
- Filtering based on: switch port, VLAN ID, COS, 802.1p priority, MAC-address, EtherType, IPv4-address, IPv6-address*, ToS, DSCP, protocol type, port number TCP/UDP
- Userdefined ACL
- ACL for telnet/SSH connections

DHCP

- IPv4 DHCP Client/Relay
- IPv4/IPv6 DHCP SnoopingOption 82, Option 37/38
- DHCP Snooping Binding (IP Source Guard)
- DHCP Server

Security

- SSH v1/v2
- SSL v1/v2/v3
- Limiting the number of MAC addresses on a port
- MAC Authentication Bypass
- Limiting Broadcast/Multicast/Unicast packets on a port by pps/Kbps
- Access Management (IP-MAC-Port Binding)
- Port Security
- Port Isolation
- CPU protection
- Dynamic ARP inspection (DAI)
- RA Snooping
- SAVI

Logging

- RAM logging
- Flash logging
- Logging to Syslog server
- Configuring the logging level
- Logging executed command

QinQ

- Port-Based
- Selective QinQ

Management and monitoring

- TACACS+
- RADIUS
- 802.1x
- Different levels of user privileges
- Passing privilege levels via RADIUS/TACACS+
- SCP/SFTP/TFTP/FTP, CLI, Telnet, Console
- SSH
- SNMPv1/v2c/v3, SNMP Traps, Public & Private MIB interface
- NTP
- ZTP
- Password encryption
- Backup and restore settings
- Ping, Traceroute
- Syslog (IPv4/IPv6)
- VCT, DDM
- Multiple IP Interface
- LLDP
- Iperf3 client
- Virtual Cabel Test (VCT)
- PPPoE Intermediate agent
- Packet-capture
- Dying gasp*
- ULDP

Traffic Mirroring

- Support 4 groups
- One-to-one / Many-to-one
- RSPAN

Humidity

- 5%-95%, no condensation

Storage temperature

- 0C ~ 45C

Storage temperature

- -40C ~ 70C

Surge protection

- Up to 4 kV

* - functionality will be implemented in future software versions

Ordering information

| Model | Description |
|---------------------|--|
| SNR-S5110G-24TX | L2+ Managed switch, 24 x 10/100/1000Base-T, 4 x 1/10G SFP+. Power: 220V AC |
| SNR-S5110G-24TX-POE | L2+ Managed PoE switch, 24 x 10/100/1000Base-T, 4 x 1/10G SFP+. Power: 220V AC. POE 250W |
| SNR-S5110G-48TX | L2+ Managed switch, 48 x 10/100/1000Base-T, 6 x 1/10G SFP+. Power: 220V AC |
| SNR-S5110G-48TX-POE | L2+ Managed PoE switch 2+, 48 x 10/100/1000Base-T, 6 x 1/10G SFP+. Power: 220V AC. POE 370W |

NAG LLC

620016, 12a Krasnolesya, str, Ekaterinburg. Russia

Tel +7(343)379-98-38 e-mail: sales@nag.ru

[Website](#)

[SNR switch community
on forum.nag.ru](#)

[NAG technical support
portal](#)

[Firmware and
Documentation](#)

